

LEDLINE ASTON APO 10

–Ultra-thin and elegant design with totally dot-free visual performance.
–IP65 waterproof, suitable for various applications.
–Strong reliability due to the co-extrusion technique and select LED of high-strength bracket. High light transmittance, anti-corrosion&anti-UV.

ONE BIN ONLY


Color consistency
Today and tomorrow



Note:
–Max. run length refers to single side feed in serial connection.
–The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
–The given color temperature is the temperature of finished product.

PARAMETER

LEDs/m	280LEDs/m
Voltage	DC24V
Width	10mm
Storage Temperature	-25℃ /-13°F _{min} 60℃ /140°F _{max}
Life Span	>54000H
Waterproof rate	IP65
Warranty	5 Years
CRI	>90



LEDLINE ASTON APO 10	STD output
Power(W/m W/ft)	9.6/2.9
Efficacy(lm/W) @4000K	65.6
Max. Ambient Tempt.(Ta _{max})	45℃ /113°F

SPECIFICATION


White	CCT		2200K	2700K	3000K	3500K	4000K	5700K	Unit Cut	Max. Run Length
	Power									
	4.8W/M	275	300	310	305	315	310	25mm	5m	
	9.6W/M	550	600	620	610	630	620	25mm	5m	
	14.4W/M	825	900	930	915	945	930	25mm	5m	

ORDER CODE

SERIES NAME	COLOR	LENGTH	POWER
APO 10	22=2200K	05000=5M/196.85"	0048=4.8W
	27=2700K		0096=9.6W
	30=3000K		0144=14.4W
	35=3500K		
	40=4000K		
	57=5700K		

Example
APO 10 – 22 –05000 – 0048
LEDLINE ASTON APO 10, 2200K,
5000mm/reel, 4.8w/m.

- 1.Max production length 30meters per reel, and the standard packaging is 5meters per reel.
- 2.Standard cable length is 30cm, if you need cable longer than 30cm, please mention us the required cable length.

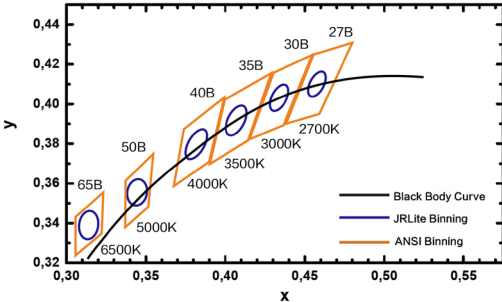

ACCESSORIES

Aluminium Profile
Order Code: AC107-AP - SA
Dimension: 1000x11.7x5.8mm/
39.37"x0.46"x0.23"(LxWxH)
Material: aluminium
Color: silver

Aluminium Profile
Order Code: AC107-AP - EA
Dimension: 1000x19x5.8mm/
39.37"x0.75"x0.23"(LxWxH)
Material: aluminium
Color: silver

Aluminium Profile
Order Code: AC107-AP - BA
Dimension: 1000x12.3x14mm/
39.37"x0.48"x0.55"(LxWxH)
Material: aluminium
Color: silver

Aluminium Profile
Order Code: AC107-CR
Dimension: 1000x11.7x5.8mm/
39.37"x0.46"x0.23"(LxWxH)
Material: aluminium
Color: silver

Mounting Clips
Order Code: AC085-10
Dimension: 14x12x5mm/
0.55"x0.47"x0.20"(LxWxH)
1Bag = 1 clip + 1 screw

End cap -2PIN
Order Code: AD110-2
Size:12x6x15mm/
0.47"x0.24"x0.59" (L x W x H)
Material: silicone with 20cm cable
Color: white
2Pin for ASTON APO 10 white color

Closed end cap
Order Code: AD110
Size: 11.8x4.5x6mm
0.46"x0.18"x0.24"(L x W x H)
Material: silicone
Color: white

Strip to Cable Connector
Order Code: AC085-201
2Pin with 15cm wire for
ASTON APO 10 white color

LEDLINE ASTON Scissor
Order Code: AF001-1

Order code: XLG-150-24-A
AC100-305V DC24V 150W
IP67, Global certification.
Non Dimmable.

Order code: ELG-150-24B
AC100-305V DC24V 150W
IP67, Global certification
3in1 dimming function: 0-10Vdc,
10V PWM signal and resistance.